




FlexCard


FLEX-AI-HS-60V

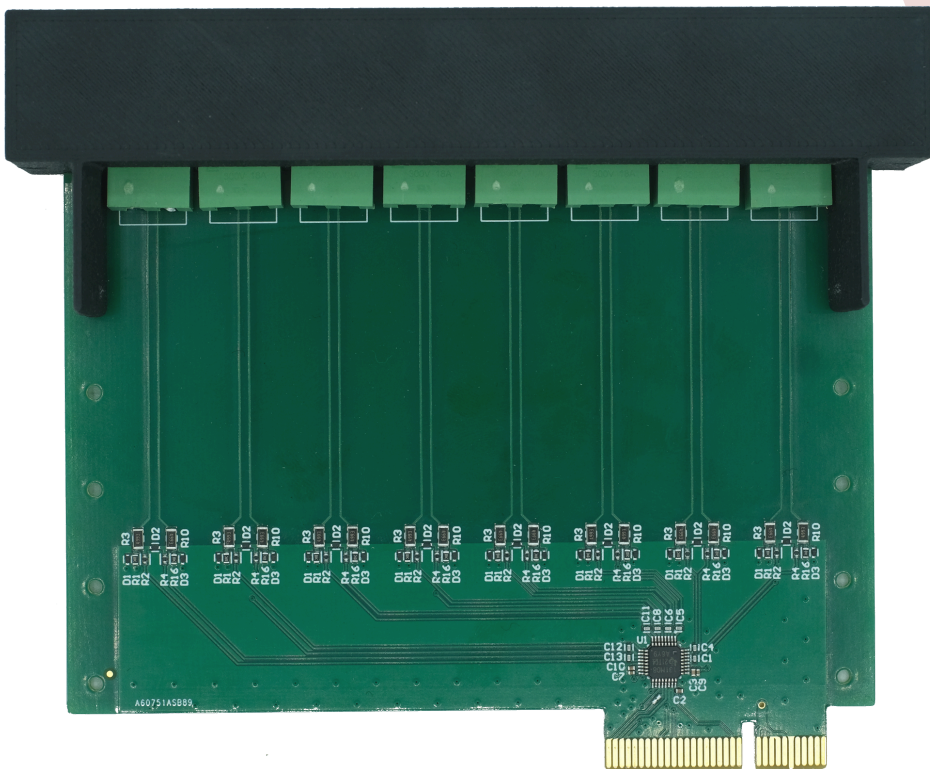

FLEXIBLE. PROCESS. CONTROL

Rev 1.0



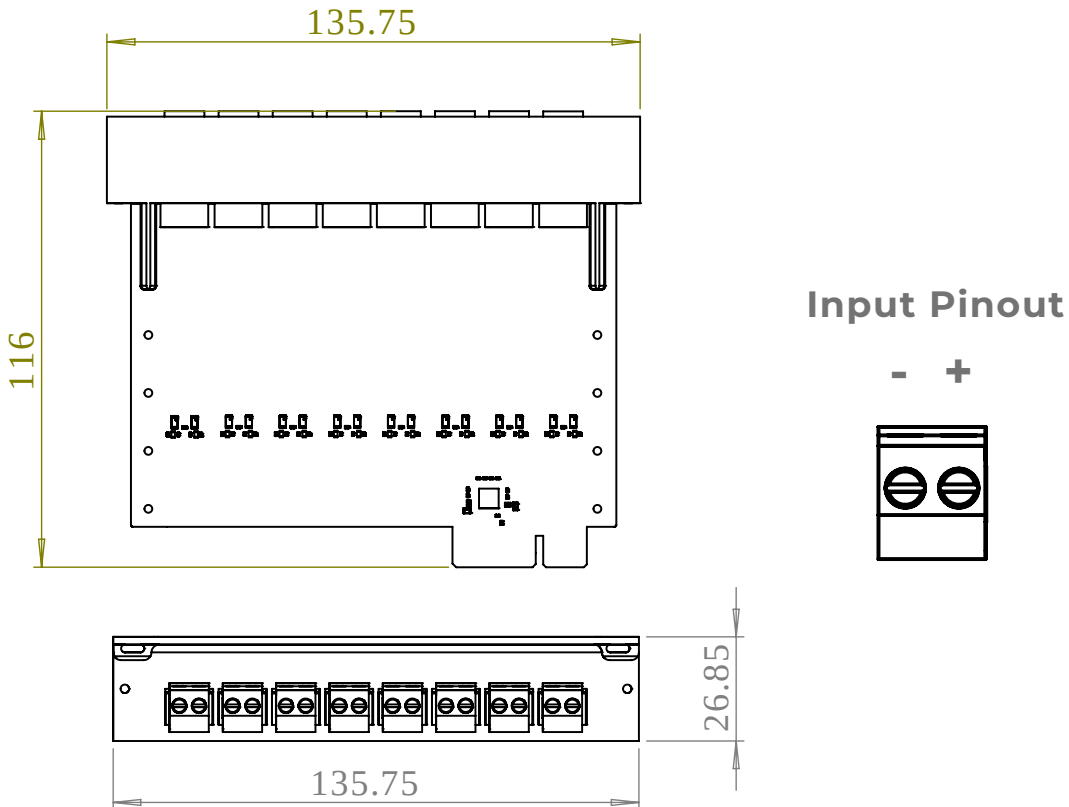

ELECTRICAL RATINGS

60V Non-Isolated Bi-Polar Inputs

PHYSICAL SPECIFICATION

Casing Material: Fibre Reinforced ABS

Dimensions: 116mm H x 135.75mm W x 26.85mm L

Weight: 90.7 grams

Screw Holes: 2x 1.5mm

OPERATING ENVIRONMENT

Operating Temperature: -40 °C to 70 °C

Operating Humidity: 10 % to 90 % non-condensing

REGULATORY & TYPE APPROVALS

Regulatory: Resistor Components: KTR18EZPF4993
ISO9001 / IATF16949 certification