




FlexCard


FLEX-SW-250VAC-5A-RLY

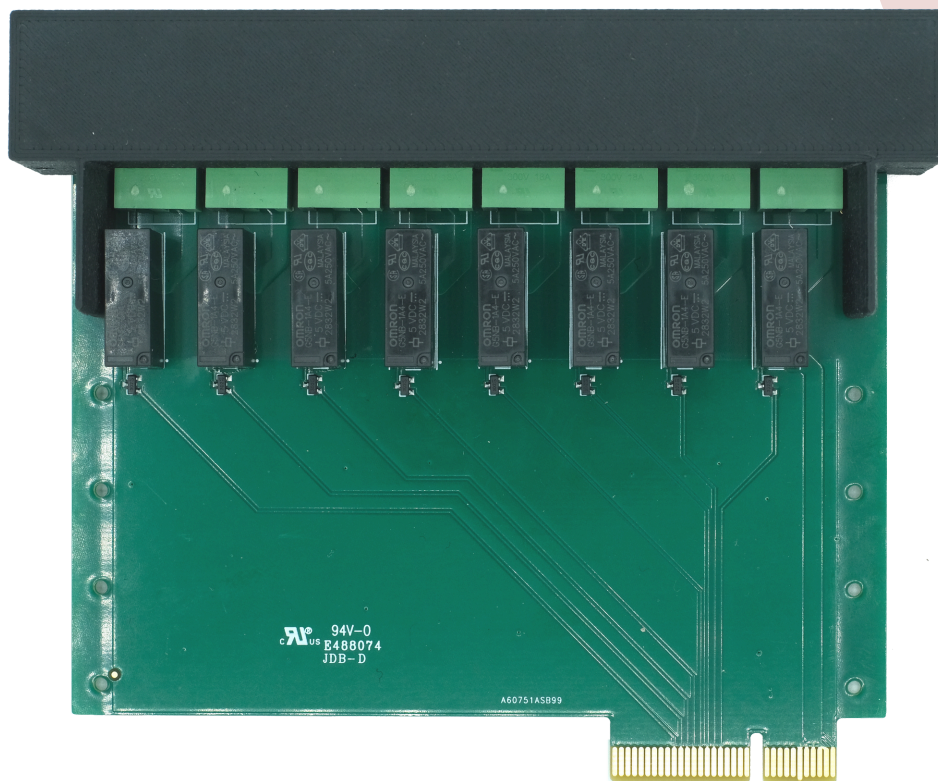

FLEXIBLE. PROCESS. CONTROL

Rev 1.0



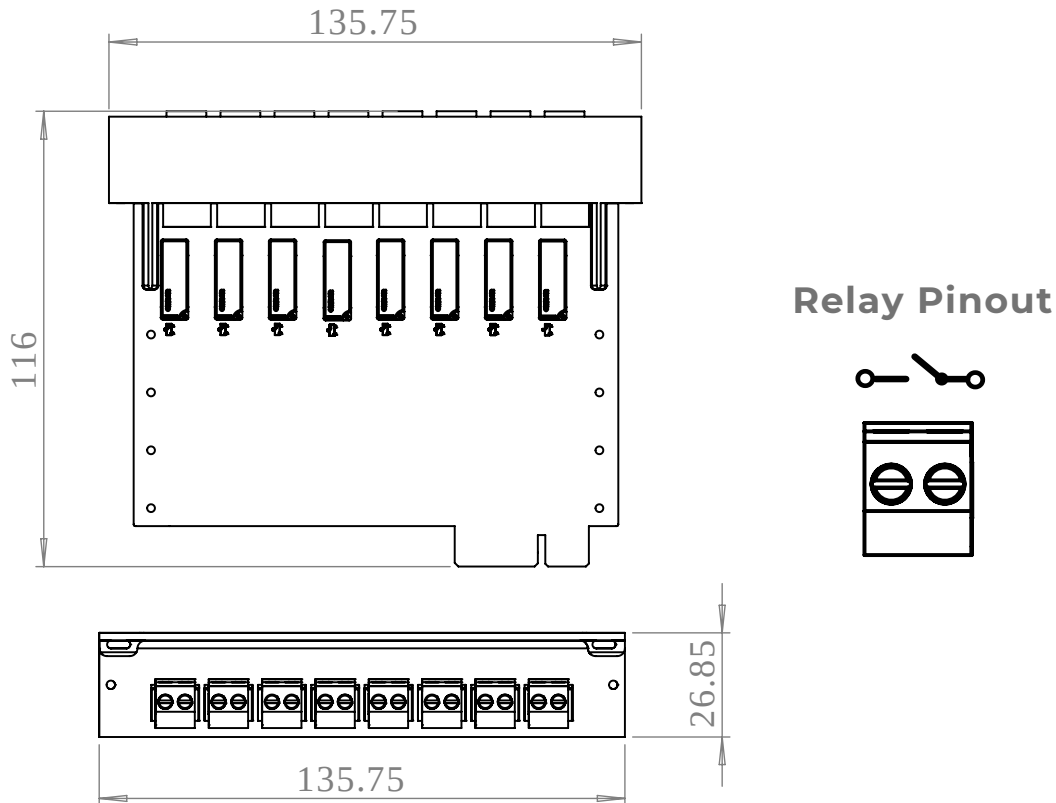

ELECTRICAL RATINGS

7A at 250VAC

5A at 30V

PHYSICAL SPECIFICATION

Casing Material: Fibre Reinforced ABS

Dimensions: 116mm H x 135.75mm W x 26.85mm L

Weight: 127 grams

Screw Holes: 2x 1.5mm

OPERATING ENVIRONMENT

Operating Temperature: -40 °C to 70 °C

Operating Humidity: 10 % to 90 % non-condensing

REGULATORY & TYPE APPROVALS

All components are UL/CUL Recognized

Relay: Omron G5NB-1A4-E: UL Recognized: (File No. E41515) CSA Certified: (File No. LR31928)